

# Grounding Resistor

The Neutral Grounding Resistors are used to ground power systems to protect power transformers and generators from damaging currents in the event of earth fault. We develop 3 types of grounding resistors:  $0\Omega$ ,  $0.05\Omega$ ,  $0.1\Omega$ .

## Technical Parameters

Resistance:  $0\Omega$


Power: 300W

Voltage: 1500V

Leak current:  $< 5\text{mA}$

Weight:  $< 4.5\text{kg}$

Dimension:  $275 \times 205 \times 134.5\text{mm}$

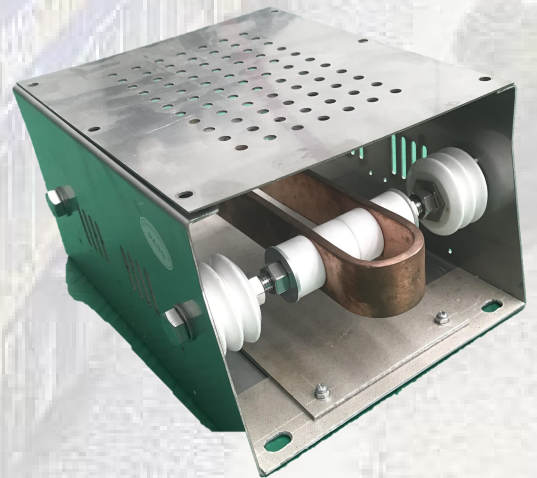

## Project

High Capacity Metro Train  
(HCMT) — Melbourne

## Customers

**Downer**

 **中国中车**  
**CRRC**

## Contact Us

**Top Rail Services Pty Ltd**

ABN: 90 167 745 575

Address: Unit 1, 7 Technology Circuit,  
HALLAM, VIC 3803,  
AUSTRALIA

Tel: 13 0077 2678

Email: [info@toprailservices.com.au](mailto:info@toprailservices.com.au)